



**UPLINK & DOWNLINKSPECTRUM ANALYZERS**

**HUB-MOUNT C-BAND & KU-BAND UP& DOWNLINK SPECTRUM ANALYZERS**



- C-band, Ku-band; Uplink or Downlink Bands Monitored at the Antenna
- Eliminates IFL and Enables IP-based Remote Monitoring
- Compact Fully Enclosed Remote Spectrum Analyzer
- Can Be Implemented Into OEM Applications
- OEM Applications
- MIL-STD 810F/G Certified
- Precise And Accurate Amplitude And Frequency Response

## CLM EXTENDED SERIES

### ULTRA COMPACT SELF CONTAINED DESIGN


The CLM Extended Series enables the user to directly monitor C-band or Ku-band uplink signals. This full-featured spectrum analyzer provides an ethernet output to monitor signals at the M&C location. Expensive L-band IFL connections are eliminated. The spectrum analyzer provides a full spectrum signal via the free Avcom GUI interface. The interface can display up to 12 feed signals on the same screen. Full control is available and the GUI is easily integrated into most M&C software platforms.

### PERFORMANCE & SPECIFICATIONS

The CLM Extended is designed for the measurement and analysis of communications and broadcast carriers, making up-link, downlink, L-Band carriers, IF, and 10MHz reference signals easy to measure, monitor, and store. The CLM Extended provides excellent frequency and amplitude accuracy along with resolution band-width (RBW) selection from 10kHz to 1Mhz. This is required to allow viewing and monitoring of small Telemetry, Tracking, Command Systems (TT&C), data carriers found in many satellite communications markets, spread spectrum, and Wi-Fi as well.

### VERSATILE REMOTE CONTROL SOFTWARE

The CLM Extended can provide discrete remote monitoring and control from anywhere in the world. The CLM Extended is monitored and controlled using the Avcom Remote Control Software via serial port, USB, or Ethernet. The Remote Control Software has an intuitive user interface that is easy to use with no special training required. It allows remote monitoring and control from your network or over the internet. Features include screen shot capture recording, SNMP for alarm/monitoring, markers, and Automated Data Acquisition (DAQ) with tolerance comparison, and integrated email alerts to name a few. The Remote Control Software is available for Windows.

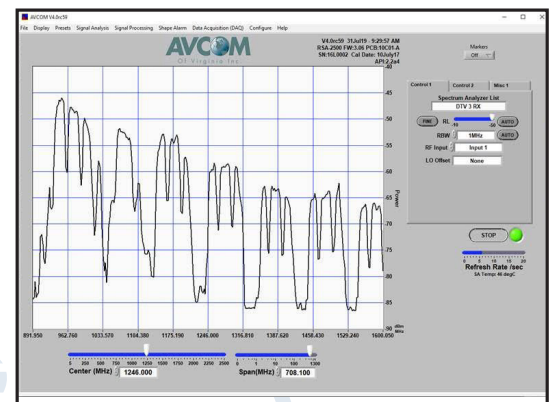



**UPLINK & DOWNLINKSPECTRUM ANALYZERS**

**HUB-MOUNT C-BAND & KU-BAND UP& DOWNLINK SPECTRUM ANALYZERS**

<b>SPAN WIDTH</b>	<b>Up to 1300 MHz (Dependent on Center Frequency)</b>
<b>RESOLUTION BANDWIDTH:</b>	<b>10KHz, 100KHz, 300KHz, 1MHz</b>
<b>RF SENSITIVITY:</b>	<b>L: Selectable -10 dBm to -50dBm in 5 dBm increments C/KU: Selectable 10 dBm to -30 dBmin 5dBm increments</b>
<b>REFERENCE LEVELS:</b>	<b>Selectable -10 dBm to -50dBm in 5 dBm increments</b>
<b>SCALE:</b>	<b>5 dB/Div &amp; 2 dB/Div</b>
<b>DYNAMIC RANGE:</b>	<b>50dBm GUI window</b>
<b>AMPLITUDE ACCURACY:</b>	<b>± 1 dB typical</b>
<b>FREQUENCY ACCURACY:</b>	<b>± 1KHz typical</b>
<b>MAX RF INPUT:</b>	<b>25 VDC MAX (DC Blocked), +30dBm (1W)</b>
<b>INPUT IMPEDANCE:</b>	<b>50 Ω</b>
<b>AMPLITUDE RANGE:</b>	<b>L: 0 dBm to -85 dBm C/KU: 20 dBm to -65 dBm</b>
<b>INPUT CONNECTOR:</b>	<b>BNC is standard. F and SMA available.</b>
<b>POWER REQUIREMENTS:</b>	<b>+15 to 24 VDC/9W</b>
<b>OPERATING TEMPERATURE RANGE:</b>	<b>-10°C to +60°C</b>
<b>SIZE:</b>	<b>9" W x 14.5" L x 2" H (22.86 x 36.83 x 5.08cm)</b>
<b>WEIGHT:</b>	<b>2.8lbs (1.3kg)</b>
<b>POWER REQUIREMENTS:</b>	<b>+15 VDC/9W</b>