



RACKMOUNT SPECTRUM ANALYZERS

RUGGED SPECTRUM ANALYZER RACK SYSTEM



SBS2-2150E-RSA



- Designed To Be Integrated Into OEM Teleport Ready
- Designed For Satcom On-The-Move (SOTM)
- Rugged Design With Extended Temperature Range
- Full Remote Control And Monitoring Via Ethernet/USB Using Free Remote Control Software (GUI)
- Posix Compliant “C” - Access Via GUI Or Available APITeleport And SNG Ready
- Precise And Accurate Amplitude And Frequency Response
- 10MHz Reference Signal Viewing Capability
- 3kHz Resolution Bandwidth Option Available

RACK MOUNT DESIGN FOR REMOTE MONITORING AND CONTROL

The RSA Spectrum Analyzer offers a rack--mount version of the rugged embedded Single Board (SBS) product. It mea- sures L-band and 10 MHz reference signals. The popular SBS has been successfully integrated into other OEM systems and is now offered in a rack- mount enclosure to meet your demanding requirements. The versatile free software GUI will monitor and control the RSA over IP and the hardware can be configured with connectors of your choice.

PERFORMANCE & SPECIFICATIONS

The SBS2-2150E-RSA input covers an extended L-Band frequency of 950MHz to 2150MHz and will also allow monitor- ing of a 10MHz reference signal. The SBS2-2150E-RSA design only requires an external input voltage, accepting a wide range of +15 to +24VDC @ 7W. Communication is provided via Ethernet or USB. The SBS2-2150E-RSA supports both commercial Ethernet and USB connectors or header connectors for easier embedded system integration. Along with resolution bandwidths of 1MHz to 10 kHz, a 3kHz RBW option is available for applications requiring very detailed signal analysis. SBS2-2150E-RSA allows changes to the number of data points used if application needs to optimize refresh rate verses resolution. The data point number can be adjusted from 1-4000 points in the control software.

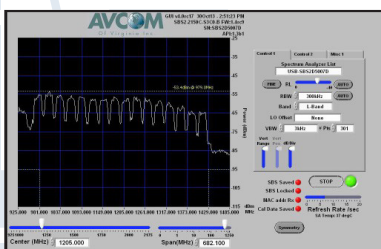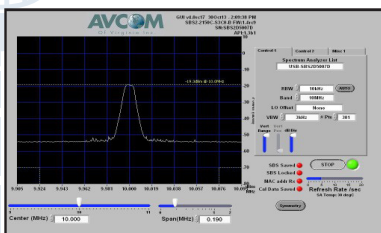

VERSATILE REMOTE CONTROL SOFTWARE

The SBS2-2150E-RSA can provide discrete remote monitoring and control from anywhere in the world. The SBS2-2150E-RSA is monitored and controlled using the Avcom Remote Control Software (GUI) via USB, or Ethernet. The Remote Control Software (GUI) has an intuitive user interface that is easy to use with no special training required. Features include screen shot capture recording, SNMP for alarm/monitoring, markers, and Automated Data Acquisition (DAQ) with tolerance comparison, and integrated email alerts to name a few. Up to twelve windows can be displayed at one time. The Remote Control Software is available for Windows.



RACKMOUNT SPECTRUM ANALYZERS

**RUGGED SPECTRUM ANALYZER
RACK SYSTEM**

FREQUENCY RANGE:	Inputs 1-3: 950MHz – 2,150MHz 8MHz - 12MHz
SPAN WIDTH	0 to 1250 MHz (L-Band) 0 to 2MHz (10MHz Reference)
RESOLUTION BANDWIDTH:	10KHz, 100KHz, 300KHz, 1MHz
RF SENSITIVITY:	Greater than -85 dBm Typical
REFERENCE LEVELS:	950MHz - 2150MHz Selectable 0 dBm to -40 dBm in 1 dB steps 10MHz - Fixed at 10 dBm
SCALE:	1-10 dB/Div
DYNAMIC RANGE:	75 dB or greater typical
AMPLITUDE ACCURACY:	± 1 dB typical
FREQUENCY ACCURACY:	± 1KHz typical
MAX RF INPUT:	25 VDC MAX (DC Blocked), +30dBm (1W)
INPUT IMPEDANCE:	50 Ω
AMPLITUDE RANGE:	0 dBm to -85 dBm (standard) 0 dBm to -105 dBm (preamp option) +10 dBm to -65 dBm (attenuator option)
INPUT CONNECTOR:	50Ω "BNC" is standard.
LNB POWER:	13-18V, 22kHz (optional)
OPERATING TEMPERATURE RANGE:	-30°C to 70°C
SIZE:	19" W x 18" L x 1.75" H
WEIGHT:	7lbs/3.18kilograms
POWER SUPPLY:	15 to 24 VDC, 7W AC/DC Converter Furnished.
HUMIDITY	0 to 95%, non-condensing
INTERFACE:	RG/45, CAT-5, USB